



# TIS IP VIDEO INTERCOM

7" Touch Screen Intercom

Data Sheet Rev 3.1

Model: TIS-AP-CDTO-18



## OVERVIEW


This solution is for anyone who wants to upgrade building security with a cost-efficient device. This video door phone allows for entrance control along with the ability to verbally and visually confirm a visitor's identity. Higher security and smoother building management are among the many advantages of this smart intercom.

### KEY BENEFITS

- + Fast response time to visitors.
- + Increases building safety.
- + Enables remote control.
- + Eliminates the need for the physical presence of the user.
- + Available for cold spots with an anti-cold version.

### KEY FEATURES

- ★ 7" capacitive touch screen.
- ★ High-quality microphone, speaker, camera, etc.
- ★ Flush-mounted.
- ★ RF card reader & Infrared sensor.

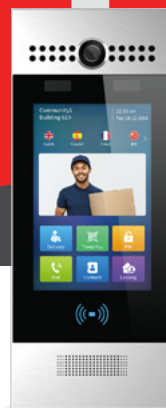

BARCODE (UPC-A)















# TIS IP VIDEO INTERCOM

## 7" Touch Screen Intercom

Model: TIS-AP-CDTO-18



### PRODUCT SPECIFICATIONS

 <b>Input</b>	Interface	7 Inch IPS LCD, capacitive touch screen 3 Mega Pixels camera
	Narrowband & Broadband audio codecs	G.711a, G.711μ, G.729 & G.722
	DC Relays	12 V DC (without PoE) 3
 <b>Output</b>	Relays	3
 <b>Network</b>	Protocols support	TIS BUS, IPv4, HTTP, HTTPS, FTP, SNMP, DNS, NTP, RTSP, RTP, TCP, UDP, ICMP, DHCP, ARP
 <b>Deployment</b>	System logs	Door access logs plus Entry log export Access table export / import Web management portal Configuration backup
 <b>Mounting</b>	Flush-mounted	by 2 screws on the base of the module
 <b>Connection terminal</b>	Ethernet ports	2xRJ45, 10/100Mbps adaptive
 <b>Operating and display elements</b>	Ports	Wiegand port, RS485 port
	Sensors Viewing Angle Upgrading	Infrared, Light, 1/3" CMOS 120°(H) / 64°(V) Over web
 <b>Functions</b>	HD picture reception Two-way audio communication Speaker Microphone Door entry	H.264, up to 1920x1080p resolution, SIP v1 (RFC2543), SIP v2 (RFC3261) 8 / 2W -32dB Auto-night mode with LED illumination, Auto- white balance.
	RF card reader Compatibility	13.56MHz & 125kHz Android OS for any 3rd party software or customization
 <b>Weight</b>	Without packaging	1.3 KG
 <b>Dimensions</b>	Length x Width x Height	130mm x 60mm x 324mm
 <b>Temperature Range</b>	Operation	-20° ... 55°C
	Storage	-40° ... 70°C
 <b>Air humidity</b>		<85% non-condensing



Copyright © 2020 TIS, All Rights Reserved

TIS Logo is a Registered Trademark of Texas Intelligent System LLC in the United States of America. This company takes TIS Control Ltd. in other countries. All of the Specifications are subject to change without notice.



TEXAS INTELLIGENT SYSTEM LLC  
SUITE# 610, 860 NORTH DOROTHY DR  
RICHARDSON  
TX 75081.USA

TIS CONTROL LIMITED  
RM 1502-p9 Easey CommBldg  
253-261 Hennessy Rd Wanchai  
Hong Kong

# TIS IP VIDEO INTERCOM

7" Touch Screen Intercom

Model: TIS-AP-CDTO-18

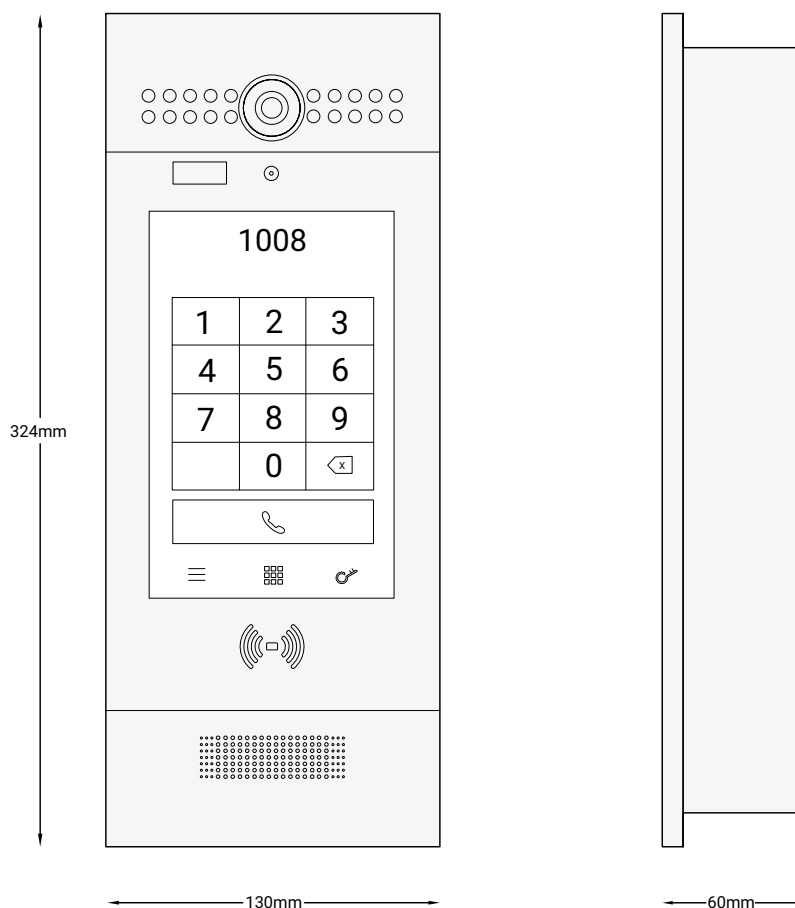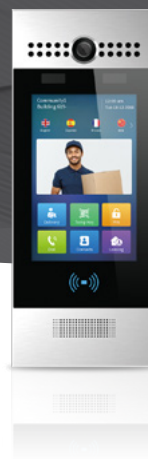

Copyright © 2020 TIS, All Rights Reserved

TIS Logo is a Registered Trademark of Texas Intelligent System LLC in the United States of America. This company takes TIS Control Ltd. in other countries. All of the Specifications are subject to change without notice.

TEXAS INTELLIGENT SYSTEM LLC

SUITE# 610, 860 NORTH DOROTHY DR  
RICHARDSON  
TX 75081,USA

TIS CONTROL LIMITED

RM 1502-p9 Easey CommBldg  
253-261 Hennessy Rd Wanchai  
Hong Kong