

WIRELESS ACM CONTROLLER

Wi-Fi Controller with 3 Dry Inputs

Data Sheet Rev 3.2


Models: ACM-3Z-IN



OVERVIEW

CEROHS PG P FC

The ACM 3Z is a Wi-Fi module with 3 digital inputs that can be used to connect any 3rd party sensor for safety and security alerts, such as water leaks, smoke detectors, and other sensor types.

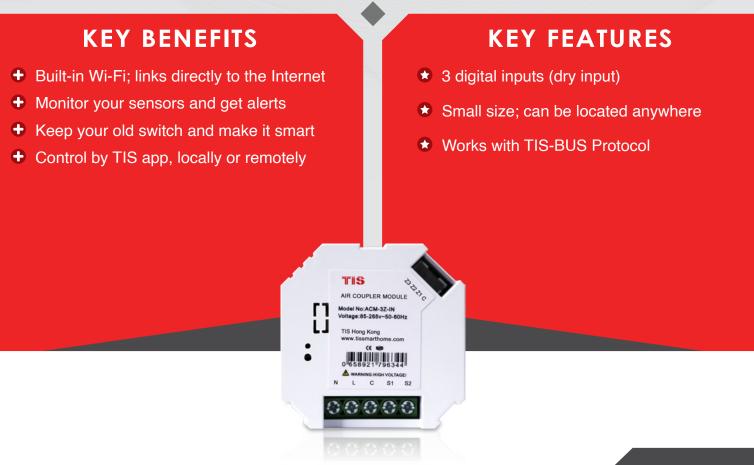




WIRELESS ACM CONTROLLER


Wi-Fi Controller with 3 Dry Inputs Models: ACM-3Z-IN





PRODUCT SPECIFICATIONS			
4	Power supply	Input Voltage Output Power Protection Current consumption	110-230 VAC 50/60 Hz 3W / 12V Built in Protection fuse 10-20 mA / 12 V DC
TISÂÎR	TIS AIR	WIFI Signal Protocol Standard	2.4 GHz 802.11 b/g/n
() -	Reaction time		approx. 30ms
ţo	Mounting	Free locate	Can be installed anywhere
ţţţ	Operating and display elements	Digital Inputs TIS AIR PRG Button with LED Upgrading	3 dry inputs for control TIS Protocol messages and commands Programming button and status LED. By WIFI Connection
Ô	Weight	Without packaging	10 g
Ŧ	Dimensions	(Width \times Length \times Height)	49mm × 20mm × 49mm
	Housing	Materials Internal Parts color IP rating	PC fire proof White IP 50
l	Temperature range	Operation Storage Transport	-1060°C -2050°C -2575°C
8	Air humidity		<80% non-condensing





Copyright © 2020 TIS, All Rights Reserved

United States of America. This company takes Intelligent System LLC in the United States of America. This company takes TIS Control Ltd. in other countries. All of the Specifications are subject to change without notice.

TEXAS INTELLIGENT SYSTEM LLC SUITE# 610. 860 NORTH DOROTHY DR RICHARDSON TX 75081.USA TIS CONTROL LIMITED RM 1502-p9 Easey CommBldg 253-261 Hennessy Rd Wanchai Hong Kong

www.tiscontrol.com